


Meter Pedestal Specifications

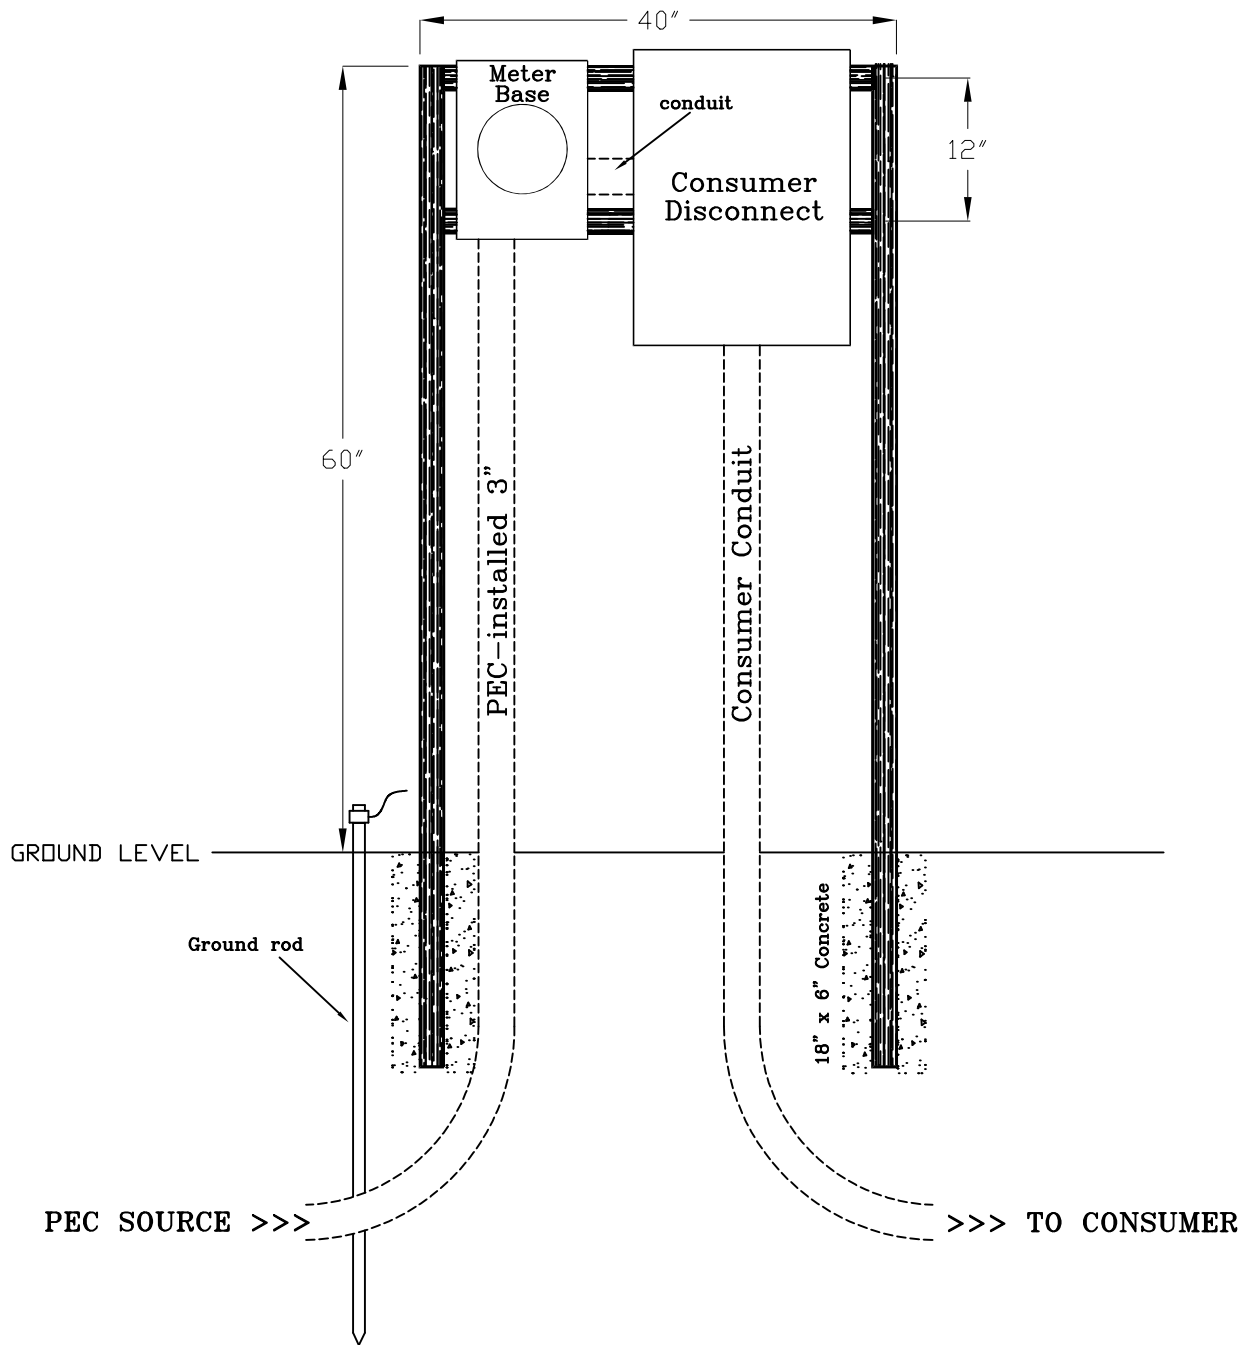

CONSUMER RESPONSIBILITIES:

- Construct pedestal (frame) to specified dimensions and bury in concrete, 18" deep.
 - PEC sells these meter pedestals at our cost; they are constructed from 2" square tubing and painted.
 - Consumer may also choose to construct using treated lumber or equivalent methods.
- Mount meter base to left side of frame (as viewed from face of meter base).
 - Meter bases may be picked up from PEC during normal hours of operation, at no cost.
- Mount weatherproof disconnect to right side of frame. Consumer furnishes disconnect.
- Install conduit from bottom of disconnect to load. Avoid placing any consumer conduits below meter base.
- Install 5/8" x 8' copper-clad steel ground rod. Consumer furnishes ground rod. Avoid placing under meter base.
- Once all above is complete, notify PEC's New Construction Dept. at (580)272-1524.